



Bending Earth

Caliber Datum Sector Lateral Surface



Datum 7927 Shale (Quarter Turn Installation)
Cover: Sector 7927 Shale (Vertical Ashlar Installation)





Lateral Surface 7948 Granite (Quarter Turn Installation)

ColorBeat

Solid, all loop textured tile available in 48 colors as 24x24 tile with select colors available as 12x36 plank. Install as a border, inset or accent tile.

ColorBeat Colorways

					
Lemon Zest 121 <input type="checkbox"/> <input type="checkbox"/>	Ground Turmeric 142 <input type="checkbox"/> <input type="checkbox"/>	Mustard Seed 168 <input type="checkbox"/> <input type="checkbox"/>	Electric Orange 252 <input type="checkbox"/> <input type="checkbox"/>	Cajun Spice 258 <input type="checkbox"/> <input type="checkbox"/>	Sundried Tomato 352 <input type="checkbox"/> <input type="checkbox"/>
					
Tango 353 <input type="checkbox"/> <input type="checkbox"/>	Mulled Wine 354 <input type="checkbox"/> <input type="checkbox"/>	Scarlet 374 <input type="checkbox"/> <input type="checkbox"/>	Aubergine 384 <input type="checkbox"/> <input type="checkbox"/>	Kaleidoscope 453 <input type="checkbox"/> <input type="checkbox"/>	Passion Purple 483 <input type="checkbox"/> <input type="checkbox"/>
					
Sterling Gray 529 <input type="checkbox"/> <input type="checkbox"/>	Kingfisher 545 <input type="checkbox"/> <input type="checkbox"/>	Jazz 546 <input type="checkbox"/> <input type="checkbox"/>	Moroccan Tile 555 <input type="checkbox"/> <input type="checkbox"/>	Hazy 559 <input type="checkbox"/> <input type="checkbox"/>	Aquatic 566 <input type="checkbox"/> <input type="checkbox"/>
					
Indigo Batik 575 <input type="checkbox"/> <input type="checkbox"/>	National Blue 595 <input type="checkbox"/> <input type="checkbox"/>	Spanish Moss 629 <input type="checkbox"/>	Wheatgrass 631 <input type="checkbox"/>	Limeade 641 <input type="checkbox"/> <input type="checkbox"/>	Parakeet 646 <input type="checkbox"/> <input type="checkbox"/>
					
Calypso 655 <input type="checkbox"/> <input type="checkbox"/>	Cypress Grove 675 <input type="checkbox"/>	Zucchini 676 <input type="checkbox"/> <input type="checkbox"/>	Driftwood 678 <input type="checkbox"/>	Hemlock 686 <input type="checkbox"/>	Secret Garden 699 <input type="checkbox"/>
					
Eggshell 717 <input type="checkbox"/>	Toasted Almond 721 <input type="checkbox"/>	Jute 726 <input type="checkbox"/>	Malt 758 <input type="checkbox"/> <input type="checkbox"/>	Latte 833 <input type="checkbox"/>	Tarnished Brass 841 <input type="checkbox"/> <input type="checkbox"/>
					
Tree Bark 862 <input type="checkbox"/> <input type="checkbox"/>	Henna 863 <input type="checkbox"/> <input type="checkbox"/>	Portobello 866 <input type="checkbox"/> <input type="checkbox"/>	Espresso 883 <input type="checkbox"/> <input type="checkbox"/>	Peppercorn 889 <input type="checkbox"/> <input type="checkbox"/>	Chalk Dust 917 <input type="checkbox"/> <input type="checkbox"/>
					
Lunar 933 <input type="checkbox"/> <input type="checkbox"/>	Stainless 934 <input type="checkbox"/>	Graphite 964 <input type="checkbox"/> <input type="checkbox"/>	Brushed Metal 976 <input type="checkbox"/> <input type="checkbox"/>	Inkwell 985 <input type="checkbox"/>	Black Bean 996 <input type="checkbox"/> <input type="checkbox"/>

24BY24

12BY36



EcoFlex™ ICT

CARPET TILE BACKING

EcoFlex ICT is a premium vinyl carpet tile backing system containing a minimum of 50% recycled content. With over 15 years in the marketplace, its ultra dense construction is engineered to offer superior performance while giving greater cushioning properties.

PERFORMANCE

- Unsurpassed dimensional stability—no growing or shrinking
- Constructed with an ultra dense five layer cushion backing system
- Main body of tile provides an effective moisture barrier (not applicable at the seams)
- Tiles are impervious to moisture damage from spills and water extraction cleaning
- Construction features superior tuft bind that is highly resistant to edge ravel
- Proven performance for over 15 years

INSTALLATION


- Superior construction offers reliability for the life of your installation

SUSTAINABILITY

- A minimum of 50% recycled content*
- Recyclable through Mohawk Group's Recover program
- May contribute to or comply with LEEDv4, and WELL Building Standard
- CRI Green Label Plus certified
- Certified at the Gold Level in accordance with NSF/ANSI 140 the Sustainability Assessment for Carpet
- Declare Label and EPD information available

SERVICE

- Engineered performance for an overall better after sales service experience

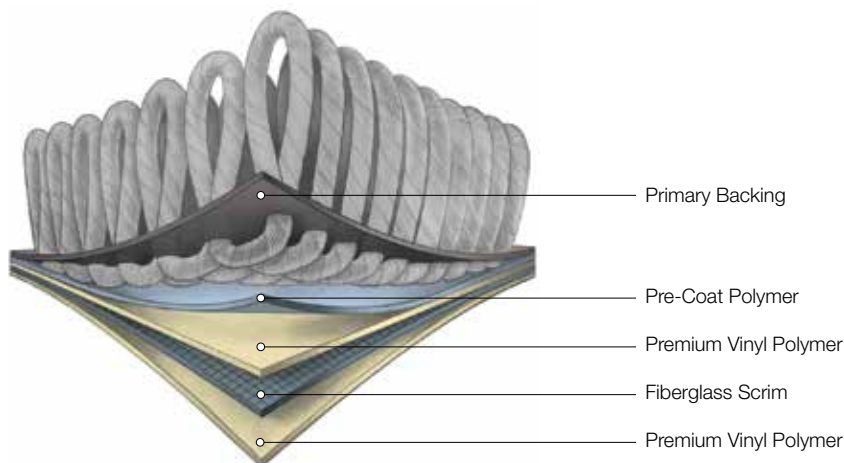

*Recycled content claim third party verified by UL (Underwriters Laboratory)

Specifications

Caliber BT282 / QB282
Datum BT284 / QB284
Sector BT285 / QB285
Lateral Surface BT314 / QB314

DESIGN

Size	24" x 24" (.6096m x .6096m)
Surface Appearance	Level Patterned Loop
Fiber Type	Colorstrand® SD Nylon
Dye Method	Solution Dyed
Installation Methods	
Framed Structure	Monolithic / Vertical Ashlar / Brick Ashlar / Quarter Turn
Shaded Lines	Vertical Ashlar / Quarter Turn
Colors Available	7

PERFORMANCE

Construction	Tufted
Gauge	1/12" (47.00 rows per 10cm)
Stain Release Technology	EcoSentry Plus Stain Protection
Soil Release Technology	EcoSentry Soil Protection
Backing Material	EcoFlex ICT
Flammability	ASTM E 648 - Class 1 (Glue Down)
Smoke Density	ASTM E 662 - Less than 450
Static Propensity	AATCC - 134 Under 3.5 KV


SUSTAINABILITY

Certification	Declared
Indoor Air Quality	Green Label Plus #1098
NSF 140	Gold

SERVICE

Warranties	Lifetime Limited Carpet Tile Warranty, Lifetime Limited Colorfastness to Light, 10 Year Limited Colorfastness to Atmospheric Contaminants, 10 Year Stain Warranty, Lifetime Static
------------	--

Installation Instructions:



Mohawk Group warrants its adhesives for the life of the original installation only when a Mohawk Group style (product) is installed. Mohawk's floor preparation procedures must be followed to ensure that the substrate has been prepared properly. Failure to use Mohawk Group adhesives or to follow Mohawk's floor preparation procedures will void all lifetime adhesive warranties. Please contact your local Sales Representative for installation guidelines.

These patterns contain inherent characteristics which may result in pattern run off and/or pattern appearance variations at the seams or tile edges (darker or lighter pattern lines). These characteristics are inherent in the patterns and are not manufacturing defects. Consideration to these characteristics should be given when selecting an installation method.

Chair pads are recommended under office chairs with roller casters to preserve appearance retention, act as a deterrent toward delamination and to prevent premature or accelerated wear. Walk-off tiles from the Tuff Stuff II Collection are recommended at entryways to reduce soiling.

Mohawk Group is providing this architect folder for the purpose of promoting our commercial business. This folder and its samples shall remain the property of Mohawk Group. Color may vary from dye lot to dye lot. Substitution of material may be made due to improved technology, supply limitations or other factors. The performance of this product is not affected by such variations.

For current and complete specifications please visit www.mohawkgroup.com



Produced with recycled materials

Mohawk Group

Mohawk Group
160 South Industrial Blvd.
Calhoun, GA. 30701
1-800-554-6637
mohawkgroup.com

QSBEN PHOTO BROCHR LT